


補償導線

1対平型ビニル絶縁・ビニル外被補償導線

(メーカー在庫品)

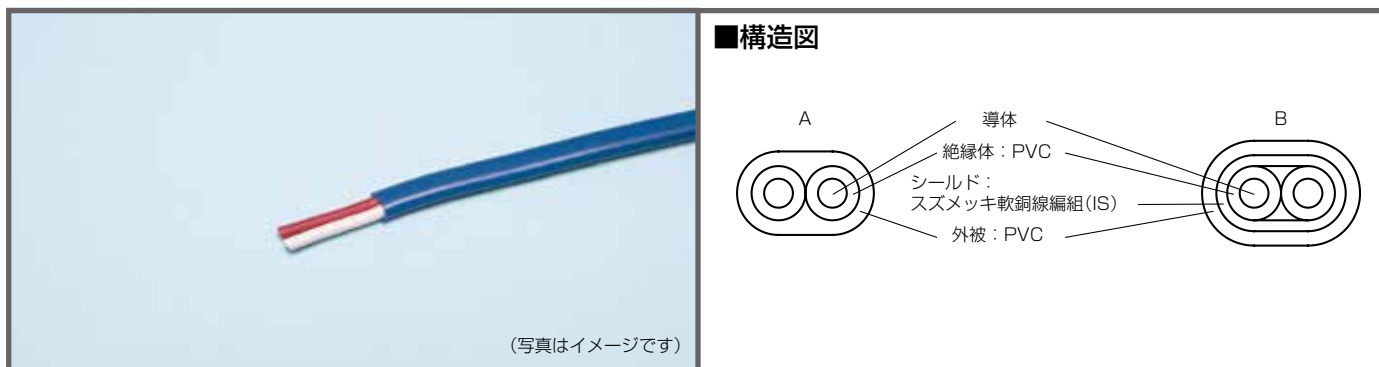

(写真はイメージです)

仕様

商品名	サイズ	対数 (P)	導体		絶縁体		対外径 (mm)	シールド厚さ (mm)	外被厚さ (mm)	仕上外径 (約mm)	形状
			構成 (本/mm)	外径 (mm)	厚さ (mm)	外径 (mm)					
VX-G-IS	7/0.3	1P	7/0.3	0.9	0.5	1.9	1.9×3.8	0.3	0.65	3.8×5.7	B
WX-G-IS	7/0.3	1P									
KX-G-IS	7/0.3	1P									
RX-G-IS	7/0.3	1P									
TX-G-IS	7/0.3	1P									
JX-G-IS	7/0.3	1P									
EX-G-IS	7/0.3	1P									
BX-G-IS	7/0.3	1P									
VX-G	30/0.18	1P	30/0.18	1.2	0.5	2.2	2.2×4.4	—	0.65	3.5×5.7	A
KX-G	30/0.18	1P									
RX-G	30/0.18	1P									
TX-G	30/0.18	1P									
JX-G	30/0.18	1P									
VX-G-IS	7/0.45	1P	7/0.45	1.35	0.5	2.35	2.35×4.7	0.3	0.7	4.4×6.7	B
KX-G-IS	7/0.45	1P									
RX-G-IS	7/0.45	1P									
TX-G-IS	7/0.45	1P									
JX-G-IS	7/0.45	1P									
EX-G-IS	7/0.45	1P									
VX-G	7/0.65	1P	7/0.65	1.95	0.6	3.15	3.15×6.3	—	0.8	4.8×7.9	A
KX-G	7/0.65	1P									
RX-G	7/0.65	1P									
TX-G	7/0.65	1P									
JX-G	7/0.65	1P									
BX-G	7/0.65	1P									

※仕様表等のデータは参考値です。商品のご採用にあたっては弊社営業担当にお問い合わせの上、メーカーの仕様書等によるご確認をお願いします。